



How to create SIQA folder without re-installing SIQA software

At The C75/J75 Printer UI:


- Select “**Log In/Out**” button on the UI panel
- Log-in as a System Administrator by typing “**admin**” as the Admin’s Login ID (password).
- Select “**Machine Status**” button on the UI panel

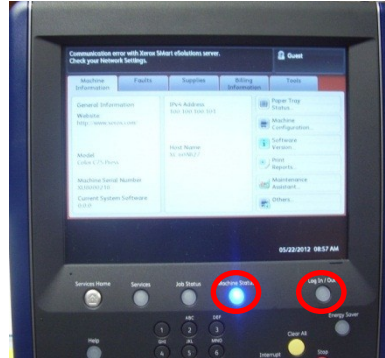


- Select the “**Tools**” tab. In the left column select “**Setup & Calibration**” and in the right column Select “**Create a Folder**”.

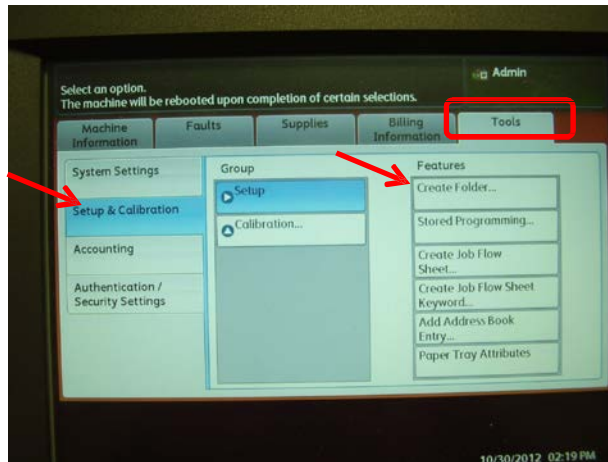


- Enter “**190**” in the “**Go to 001↔500**” box.

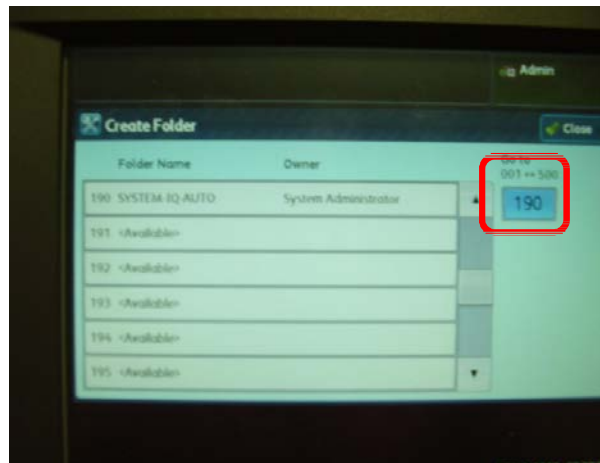


- Enter “1 2 3 4 5” in the “Folder Passcode” box.

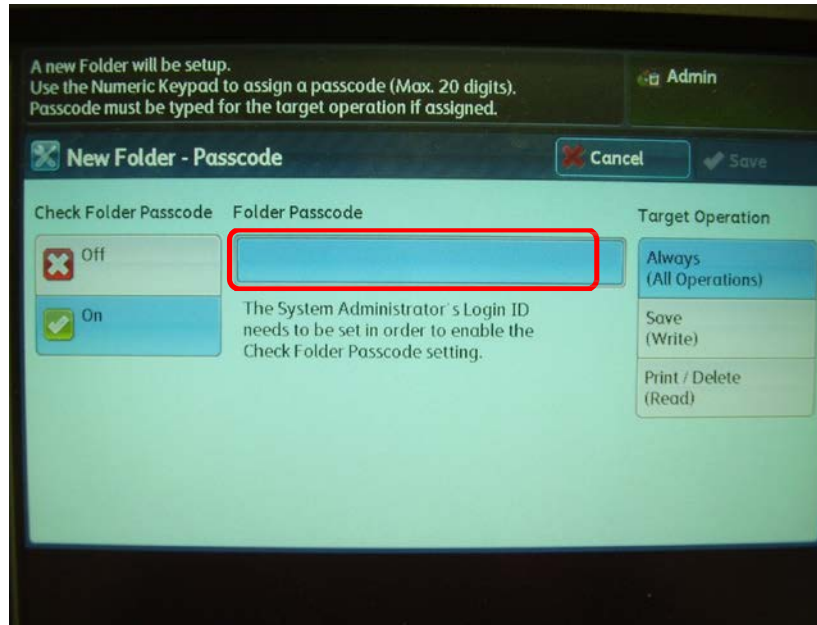


- Select “Folder Name”

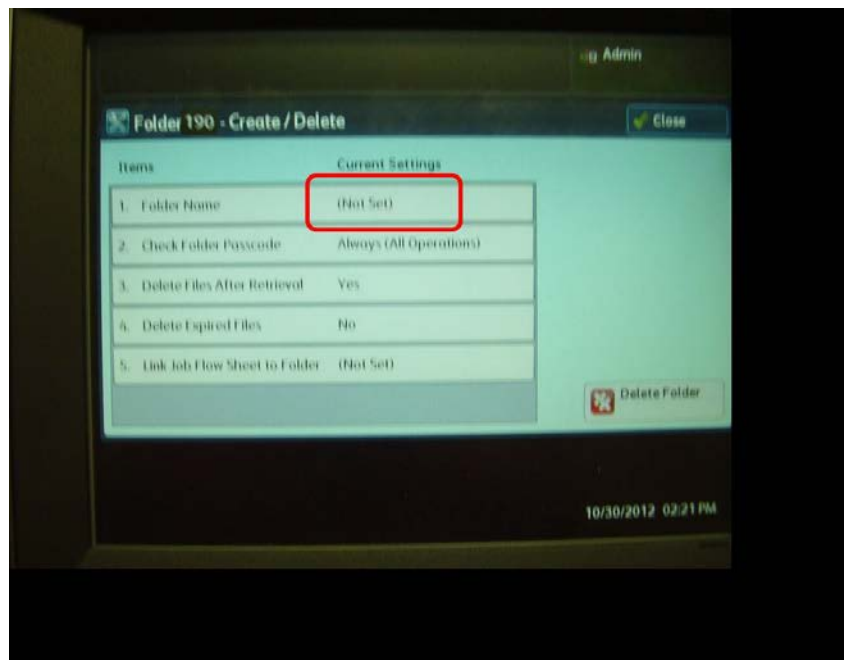

- Enter in capital letters “SYSTEM-IQ-AUTO” and then select “Save”

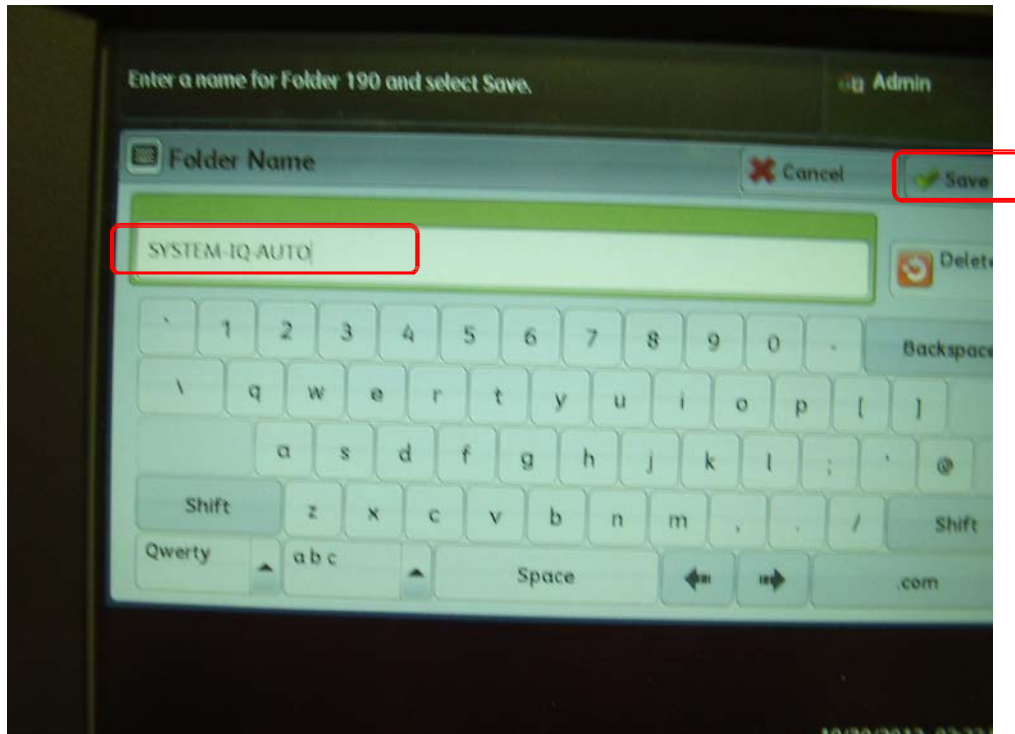


- Check to see if the screen looks like the one below. If ok, select “Close”

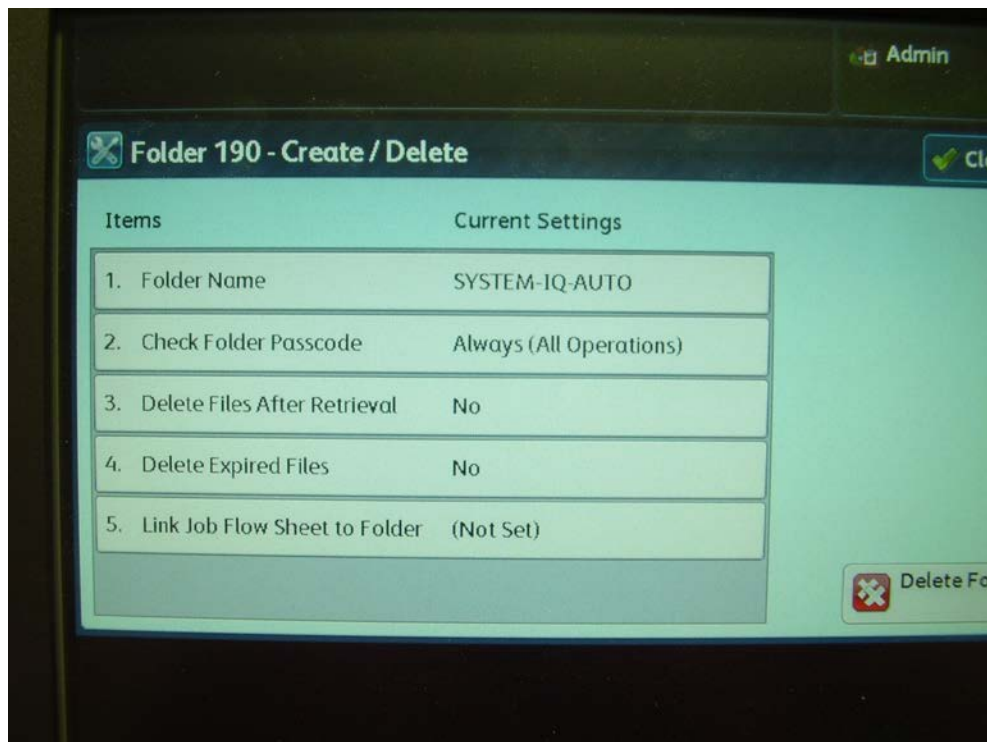




- Close all screens and log out of Admin

At The 3rd Party PC or at the EFI DFE Standalone server:

- Start up the application by clicking SIQA shortcut on the desktop and log in as a key operator.

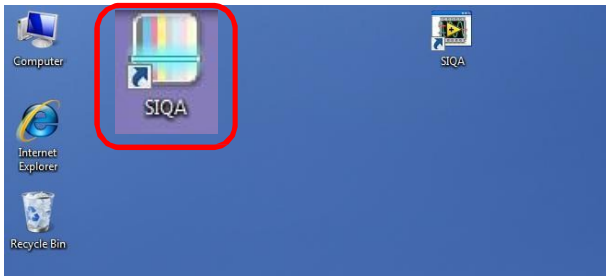

- Select “**Network Settings**”. Enter the IP address of the C75/J75 Printer (IOT), and password as needed

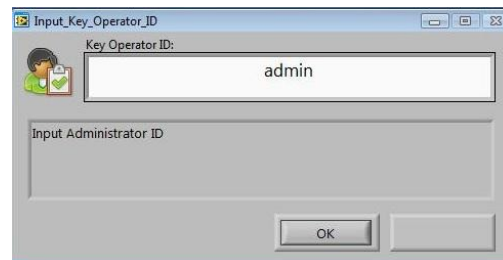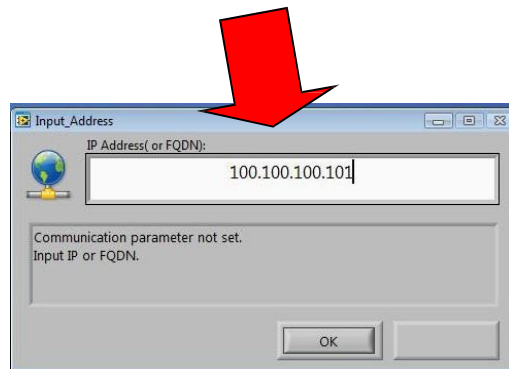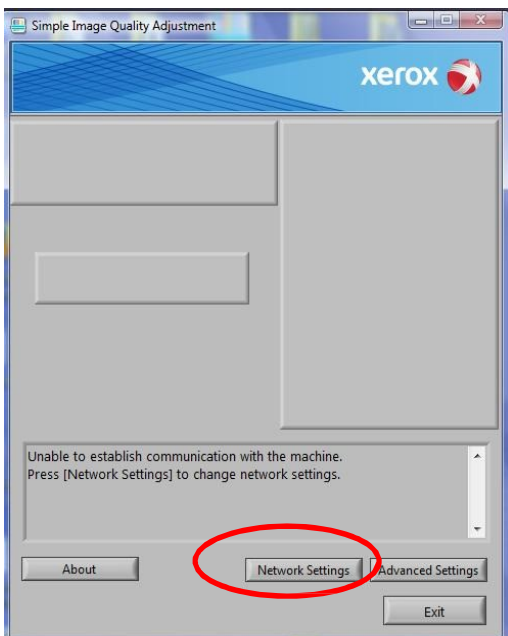

- At this point – the SIQA should communicate and allow you to run SIQA Density or Alignment adjustments.